


Option 2: Having two different temperature zones in your house 60.C & 50.C

Installation of a tempering valve at your continuous flow HWS. In most cases a new pipe has to be installed to your HWS to separate the pipework into two zones. See photo.

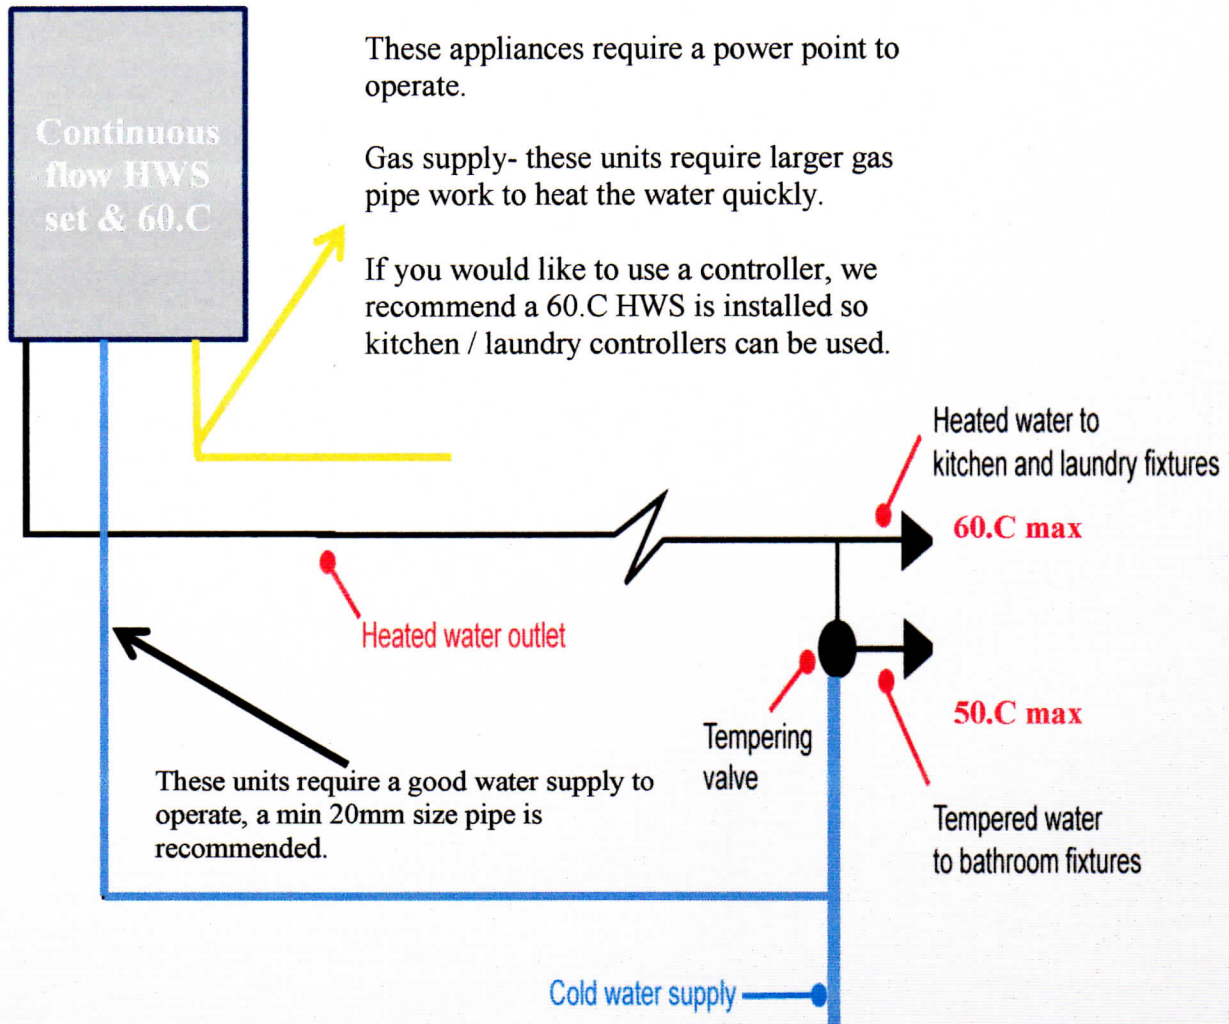

Mob: 0400063625

Web: www.plumbingbytim.com.au

Email: tim@plumbingbytim.com.au